



FX710RC Issue 1 Xenon 4Kw Remote Control.



## **APPLICATION**

The Francis 4kw Xenon searchlight, is one of the most powerful searchlight available worldwide.

This Premium variable speed Remote Controlled Searchlights incorporate the design features required to successfully operate searchlights in the most demanding product operating environments on land and sea.


These high power Xenon searchlights are well suited to applications where long range, excellent light output and a robust construction are required. Well suited to both marine and security applications.

The Francis bus (FBUS) is a custom communication protocol based on RS485 two-wire bi directional communication hardware. The system provides a simple bi directional link between searchlights and control panels.

The colour temperature of the Xenon lamp being equal to that of 'sunlight', make this the searchlight ideal for polar regions.

## **SPECIFICATION**

- Instant re-strike. No "cooling" down time required.
- Toughened super clear Optiwhite front glass.
- Parabolic Glass Reflector
- Constructed from marine grade materials and fixings
- Powder coated and stove enamel paint finish.
- Pan rotation 385°
- Tilt elevation control ±30°
- Variable speed LED joystick, with auto home position.
- RS485 connectivity. Dimmable Control Panel.
- Variable Rotation Speed 1 to 35°/sec (Pan)
- Variable Elevation Speed 1 to 8°/sec (Tilt).
- Heater fitted in gearbox
- Operational temp -50°
- Remote lamp focus, 1.5° spot to 10° flood.
- 230v Single Phase Xenon Power Supply
- Sealing IP66 Gearbox, IP56 Searchlight, PSU IP20
- Weight Searchlight 200kgs

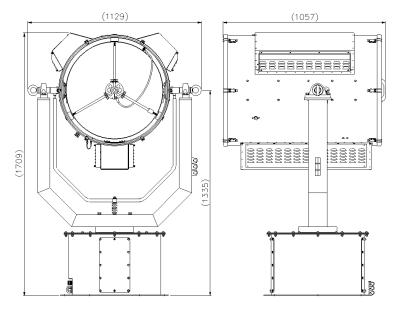

## **ALL DIMENSIONS IN MILLIMETRES**

Base fixing details: 6 holes 12.5  $\emptyset$  equi-spaced on a 650 PCD

## **Part Numbers**

Type Supply Watts Part No. FX710RC 220v 4kw A7296S 4Kw Xenon Lamp

# **Optional Controls:**

Program Record Function
Computer Control Software
Azimuth LED Control Panel
Master Control Panel (control up to 4 Searchlights)
Slave Control Panels (with full control)
Fiber Optic/TCP/IP Connections
DMX Control

VAC	Lamp life	Range @ 1 Lux	PBCP X 1000	Div	Watts
220v	1000hrs	16,749	280,517	1.5°	4000w