

FSP250 Halogen Signalling Projector

The FRANCIS FSP250 Signalling Searchlight incorporates the features required to successfully operate searchlights in the most demanding product operating environments on land and sea.

The 250mm (10") pedestal or bridge wing mounted light is used on medium and large craft for ship to ship and ship to shore signalling using the morse code or similar signalling code.


The light is all brass, anti-magnetic construction and is fully weatherproof.

Information:


- Toughened super clear Optiwhite front glass.
- Parabolic glass reflector.
- Marine grade materials and fixings.
- Stove enamel paint finish.
- 250mm (10")~ Signalling Projector.
- Signalling range minimum of 10 Nautical miles
18.5 km (daylight)
- Signalling speed of 12 words per minute.

Optional extras:

- C03323-01 Pedestal Assy NSN 5895-99-301-4711
- C02040-00 Waterproof cover
- C14194-01 Amber Filter Assy
- C14336-01 Green Filter Assy
- C14195-01 Yellow Filter Assy
- C06244-01 Red Filter Assy

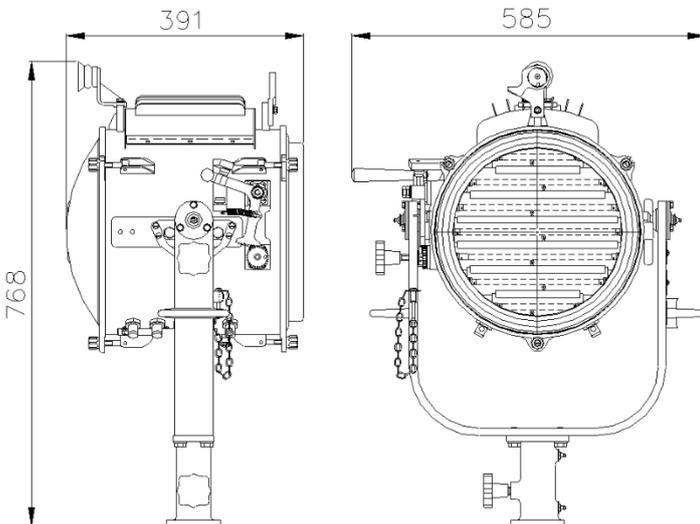

3 HOLES $\varnothing 14.3$
ON 95.25 PCR

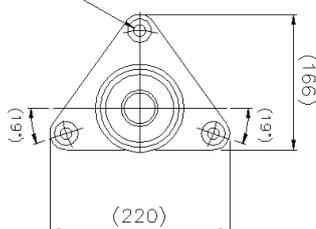

Specification	
Input voltage:	115-240v AC
Input current:	10A Max
Total power consumption:	1200w
Halogen power:	1000w
Divergence:	6°
Lamp life (approx.)	200 h
Colour temperature:	3200K
Luminous flux:	26,000 lumens
Pan rotation:	360°
Tilt elevation:	+60° -45°
IP rating:	IP56
Pedestal Base Fixings:	3 holes $\varnothing 14.30$ on a 95.26 PCD
H,W,D:	768 x 585 x 391mm
Searchlight weight:	33Kgs
Pedestal weight:	11.5Kgs
Part Numbers:	
A4047 FSP250D Deck Signalling Projector NSN: 5850-99-799-7340	
D24418 115v 1Kw Halogen Lamp NSN: 6240-99-340-5216	
D24415 230v 1Kw Halogen Lamp NSN: 6240-99-464-5106	