



L300RC Issue 3  
LED 234w Remote  
Control Remote Focus

## APPLICATION

The Francis Remote Focus LED searchlight range has been developed to offer an Efficiently and Environmentally Friendly alternative to traditional lamp sources. Using the highest grade of LED Chip, this range offers a high power output with low power consumption. Using a series of precision made glass lenses to optimize and collimate the light output, to achieve a greater range and output. The high power LED Chip has 20,000 hour life.


As with all Francis products, the construction is robust and of the highest quality. To dissipate the heat generated by the high power LED, there has been a great focus on thermal management, fitting an internal heatsink, cooled by internal fans, maintaining the heatsink at the required temperature, to optimise the chip output.

Francis Searchlights have developed and improved all remote controlled searchlights across the range still further by adding full variable speed, Azimuth LED Position Display, offering Bus Control, auto home position setting, all at no extra cost, with Optional Controls available on request.

The 234w LED gives illumination characteristics in excess of a 300w Xenon lamp / 3kw Halogen.

## SPECIFICATION

- Toughened super clear Optiwhite front glass.
- 20,000 lamp life hours
- Precision made glass lenses.
- Constructed from marine grade materials and fixings.
- Powder coated and stove enamel paint finish
- Pan rotation 365° Tilt elevation control  $\pm 35^\circ$ .
- Variable speed LED joystick, with auto home position.
- RS485 connectivity, Dimmable Control Panel
- Variable Rotation Speed 1 to 60°/sec (Pan).
- Variable Elevation Speed 1 to 17°/sec (Tilt).
- Heater fitted in gearbox & barrel.
- Operational temp -50°.
- Colour Temp options 6500k
- Sealing - IP67 Gearbox, IP56 Searchlight.
- Searchlight weight 42kgs.
- Remote Focus fitted as standard, giving an impressive range of 4 - 10° beam divergence adjustment.
- Redesigned gearbox housing, incorporating cable termination, for direct connection to the internal LED Driver.

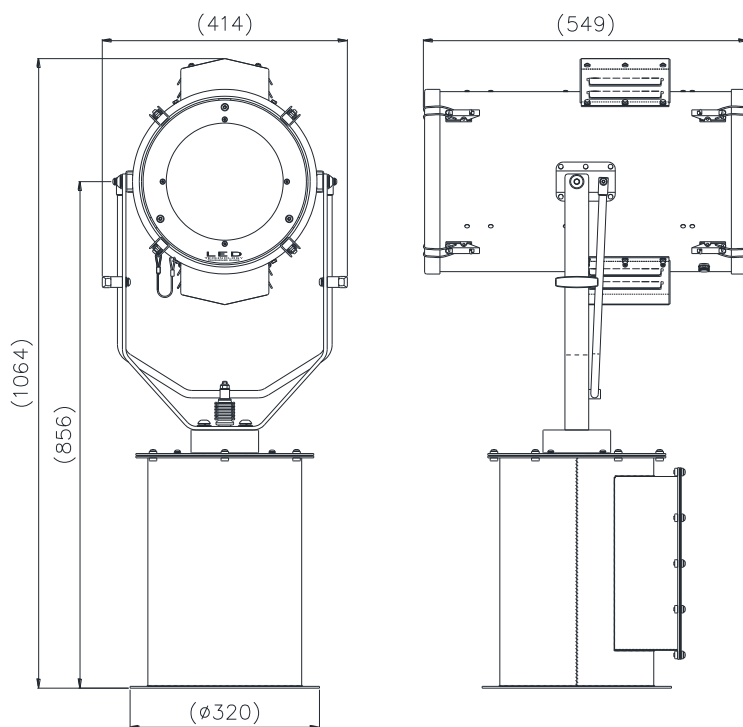

## ALL DIMENSIONS IN MILLIMETRES

Base fixing details:

4 holes 12.5  $\varnothing$  equi-spaced on a 290mm PCD  
Joystick panel 125 x 150mm (106 x 106mm cutout)

## Part Numbers

| Type      | Supply   | Watts | Part No |
|-----------|----------|-------|---------|
| L300RC RF | 115/230v | 234w  | A7221   |

## Optional extras:

Computer Control Software  
Azimuth LED Control Panel  
Master Control Panel (control up to 6 Searchlights)  
Slave Control Panels (with full control)  
Fiber Optic/TCP/IP Connections  
Flir Thermal camera  
IR LED Night Vision  
Strobe Capability

| VAC/DC  | Lamp life  | Range @ 1 Lux | Luminous Flux | Div   | Watts |
|---------|------------|---------------|---------------|-------|-------|
| 24-230v | 20,000 hrs | 3047m         | 35,537        | 4-10° | 234w  |