


**At a glance searchlight performance table**

"FR" SEARCHLIGHT PREMIUM RANGE – Glass mirror reflector etc IP66 – Tungsten Halogen									
Model No.	Max volts	Max watts	Range (M)	Candle power	Model No.	Max volts	Max watts	Range (M)	Candle power
<b>FR230</b>	12/24v	250w	1095	1,200,000	<b>FR280</b>	12/24v	250w	1360	1,800,000
<b>FR230</b>	115/230	300w	888	790,000	<b>FR280</b>	115/230	300w	1200	1,250,000
<b>FR300</b>	115/230	1000w	970	940,000	<b>FR380</b>	115/230	1000w	1110	1,465,000
<b>FR480</b>	115/230	1000w	1440	2,078,000	<b>FR560</b>	115/230	1000w	1550	2,450,000
<b>FR480</b>	115/230	2000w	1643	2,701,000	<b>FR560</b>	115/230	2000w	2030	3,900,000



"LITE" SEARCHLIGHT RANGE (stainless steel, – Aluminium reflector) IP66 – Tungsten Halogen									
Model No.	Max volts	Max watts	Range (M)	Candle power	Model No.	Max volts	Max watts	Range (M)	Candle power
<b>L230</b>	24v	250w	707	500,000	<b>L230</b>	115/230	300w	368	136,000
<b>L300</b>	24v	250w	948	899,000	<b>L300</b>	115/230	1000w	911	831,000
<b>L380</b>	24v	250w	1228	1,510,000	<b>L380</b>	115/230	1000w	1296	1,296,000
<b>L480</b>	115/230	1000w	1440	2,078,000	<b>L480</b>	115/230	2000w	1643	2,701,000
<b>L560</b>	115/230	2000w	2030	3,900,000	<b>L560</b>	115/230	3000w	2450	4,850,000

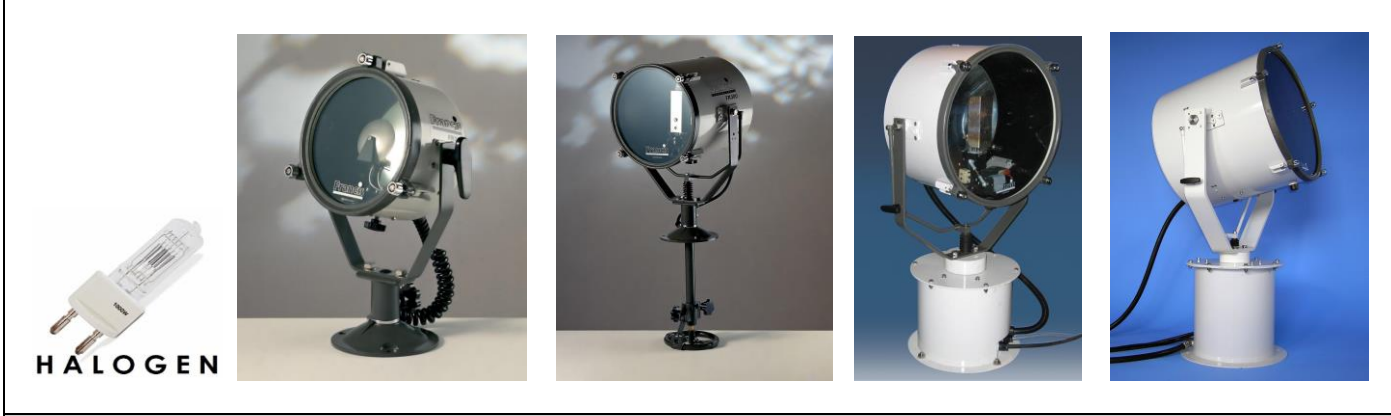

**LED SEARCHLIGHT RANGE – LED Technology - Efficiency, performance and long life cycle**

Model No.	Max volts	Max watts	Range (M)	Luminous Flux	Model No.	Max volts	Max watts	Range (M)	Luminous Flux
<b>L230LED</b>	12/24	40w	500	4,800	<b>L230LED</b>	115/230	90w	823	9855
<b>L300LED</b>	115/230	110w	1089	13,900	<b>L300LED</b>	115/230	234w	3047	35,535
<b>V2</b>	24/115/230	150w	1068	18,880	<b>L480LED</b>	115/230	200w	1546	27,800



**“FH” SEARCHLIGHT RANGE – Metal Halide (Discharge). Performance, cost effective**

Model No.	Max volts	Max watts	Range (M)	Candle power	Model No.	Max volts	Max watts	Range (M)	Candle power
<b>FH300</b>	115/230	575w	3685	13,600,000	<b>FH380</b>	115/230	1200w	5343	28,500,000
<b>FH560</b>	115/230	2500w	11,870	141,000,000					



**“LX” SEARCHLIGHT RANGE –Xenon (Discharge) Performance, cost effective**

Model No.	Max volts	Max watts	Range (M)	Candle power	Model No.	Max volts	Max watts	Range (M)	Candle power
<b>LX230</b>	12/24/230	100w	1761	3,100,000	<b>LX300</b>	24/115/230	300w	3479	12,100,000
<b>LX300</b>	24v	150w	2465	6,000,000	<b>LX480</b>	115/230v	1000w	9000	67,000,000



**"FX" SEARCHLIGHT RANGE – Xenon (Discharge) Performance, cost effective**

Model No.	Max volts	Max watts	Range (M)	Candle power	Model No.	Max volts	Max watts	Range (M)	Candle power
<b>FX230</b>	24v	150w	2341	5,479,000	<b>FX380</b>	115/23	500w	5290	28,000,000
<b>FX380</b>	115/230	1000w	6700	45,000,000	<b>FX380</b>	115/230	2000w	7485	56,000,000
<b>FX560</b>	115/230	1000w	9003	81,000,000	<b>FX560</b>	115/230	2000w	10,396	108,000,000



**"VOYAGER 2" SEARCHLIGHT RANGE – Halogen, Metal Halide (Em Arc), Xenon & LED**

Model No.	Max volts	Max watts	Range (M)	Candle power	Model No.	Max volts	Max watts	Range (M)	Candle power
<b>VH500</b>	24/115/230	250w	1673	2,800,000	<b>VX500</b>	24/115/230	150w	2760	7,600,000
<b>VM500</b>	115/230v	350w	4808	23,000,000	<b>VX500</b>	115/230v	300w	3920	15,400,000
<b>VX500</b>	12/115/230	100w	2081	4,300,000	<b>V2 LED</b>	24/115/230	150w	1068	18,800



HA LO GEN



METAL HALIDE



**SUEZ CANAL SEARCHLIGHT (according to Suez Canal Authority Rules of Navigation)**


Model No.	Max volts	Max watts	Range (M)	Candle power	Model No.	Max volts	Max watts	Range (M)	Candle power
<b>FL710D</b>	240v	3000w	2196	4,821,000	<b>LSP380</b>	240v	575w	3767	14,190,201



METAL HALIDE



HA LO GEN

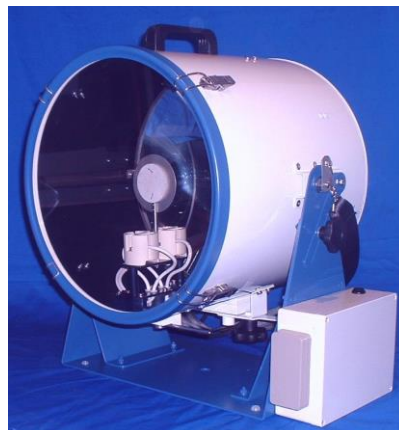

**Any questions, please just ask.  
sales@francis.co.uk**